



DOUBLE ACTION SANDERS

APPLICATIONS

Widely used at various industries of car body repairing, wooden working, metal working, FRP working, etc. with AK-TOOL's excellent sanding program. Tools are of low vibration, low gravity center, well-balanced.


● AK-51 1.2" Mini Double Action Sander **● AK-52** Mini Double Action Sander




● AK-54 4" Double Action Sander **● AK-55** 5" Double Action Sander



● AK-551 5" Double Action Sander **● AK-56** 6" Double Action Sander

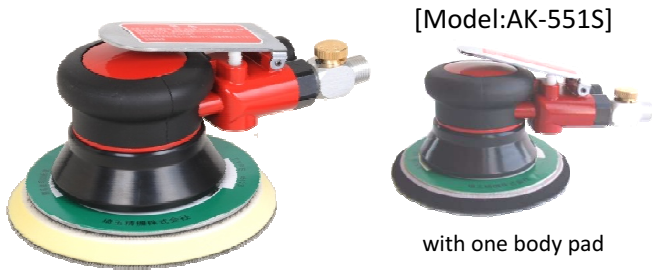

● Special pads for AK-551 **● AK-556** 5" Double Action Sander

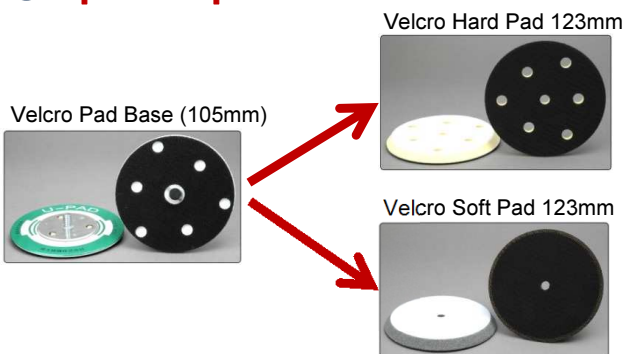

Model	Pad Size (mm)	Speed (no load) rpm	Orbit Dia. (mm)	Air Cons. (L/min)	Pad Screw Size (mm)	Air Inlet (inch PT)	Net Weight (kg)	Length (mm)	Noise Level (dBA)
AK-51	30	8,500	3	140	-	1/4	0.48	175	75
AK-52	45/72	10,000	3	280	5/16-24UNF	1/4	0.71	198	83
AK-54	98	9,000	5	340	5/16-24UNF	1/4	0.7	165	78
AK-551	123	9,000	5	340	5/16-24UNF	1/4	0.69	175	78
AK-551S	123	9,000	5	340	5/16-24UNF	1/4	0.69	175	78
AK-55	123	10,000	5	380	5/16-24UNF	1/4	0.9	175	78
AK-56	148	10,000	5	380	5/16-24UNF	1/4	0.9	185	78
AK-556	123	11,000	6	400	5/16-24UNF	1/4	1.7	265	80