



# DOUBLE ACTION SANDERS - dust extraction

## APPLICATIONS

Widely used at various industries of car body repairing, wooden working, metal working, FRP working, etc. with AK-TOOL's excellent sanding program. Tools are of low vibration, low gravity center, well-balanced.

### ● AK-54D 4" Double Action Sander





### ● AK-551D 5" Double Action Sander




### ● AK-55D 5" Double Action Sander



### ● AK-56D 6" Double Action Sander

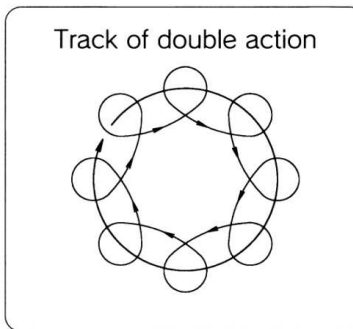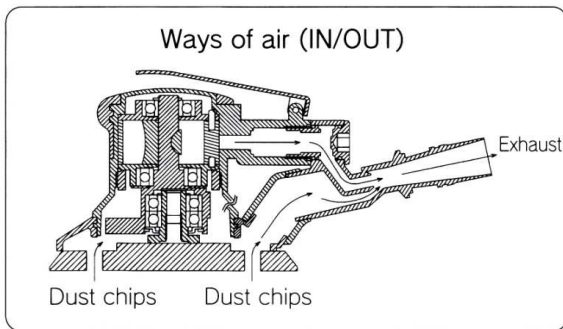

## ● Holes positions of pads

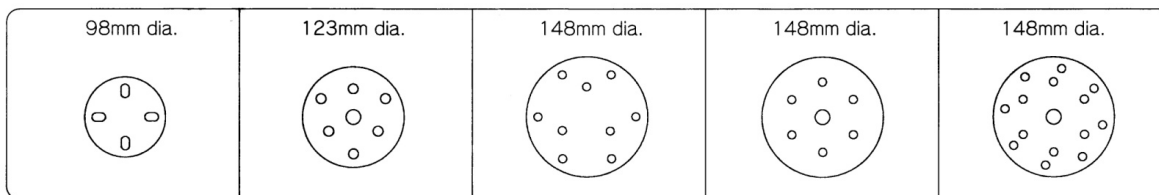

Model	Pad Size (mm)	Speed (no load) rpm	Orbit Dia. (mm)	Air Cons. (L/min)	Pad Screw Size (mm)	Air Inlet (inch PT)	Net Weight (kg)	Length (mm)	Noise Level (dBA)
AK-54D	98	8,500	5	340	5/16-24UNF	1/4PT	0.73	213	78
AK-551D	123	8,500	5	340	5/16-24UNF	1/4PT	0.75	225	78
AK-55D	123	8,500	5	380	5/16-24UNF	1/4PT	0.96	225	78
AK-56D	148	8,500	5	380	5/16-24UNF	1/4PT	0.96	237	78