



DOUBLE ACTION SANDERS - dust extraction

APPLICATIONS

Widely used at various industries of car body repairing, wooden working, metal working, FRP working, etc. with U-TOOL's excellent & powerful self-vacuum dust extraction system.

U-54D 4" Double Action Sander



U-551D 5" Double Action Sander



U-55D 5" Double Action Sander



U-56D 6" Double Action Sander




U-55XD 5 1/6" Double Action Sander



U-55JD 5" Double Action Sander



Hole positions of pads

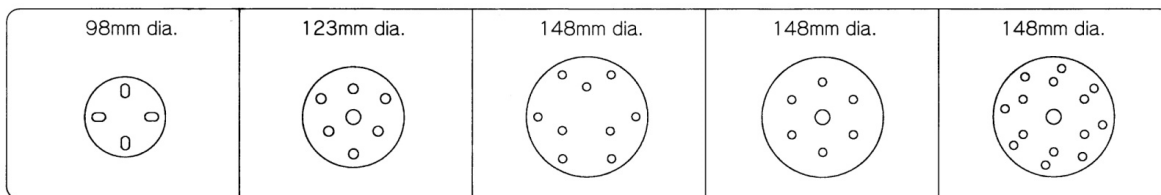

Model	Pad Size (mm)	Speed (no load) rpm	Orbit Dia. (mm)	Air Cons. (L/min)	Pad Screw Size (mm)	Air Inlet (inch PT)	Net Weight (kg)	Length (mm)	Noise Level (dBA)
U-54D	98	8,500	5	340	5/16-24UNF	1/4PT	0.73	213	78
U-551D	123	8,500	5	340	5/16-24UNF	1/4PT	0.75	225	78
U-55D/56D	123/148	8,500	5	380	5/16-24UNF	1/4PT	0.96	225/237	78
U-55XD	123/148	10,000	5	400	5/16-24UNF	1/4PT	0.78	182	80
U-55JD	123	9,000	10	350	5/16-24UNF	1/4PT	1.07	225	83